CODELOCKS
control + convenience
PRODUCT RANGE
January 2005
1
2
3
4
5
6
7
8
9
*
0
#
CODELOCKS.COM

1
2
3
1
2
3
4
5
6
7
8
9
*
0
#
CODELOCKS.COM

At Codelocks, we are dedicated to giving our customers control and convenience.

Our comprehensive range of mechanical and piezo-electronic locks provides solutions for a wide range of commercial and domestic door control applications.

Founded in 1990 in the UK, the company now sells its products worldwide. A new distribution centre was opened in California in January 2004 which is responsible for Codelocks sales throughout the Americas. A new factory was opened in Southern China in Autumn 2004 which, in addition to giving the company greater control of quality, costs and efficiency, has also provided the opportunity for sales directly to the Chinese and other Asian markets.

Our passion for quality and service means that we are the only brand in our market sector which offers:

The Complete Package – we provide everything in the box to fit the lock to the door – parts, instructions, templates – everything except the tools.

A Lifetime Guarantee – any of our locks will be repaired, serviced or replaced free of charge if they develop a fault at any time as a result of poor manufacturing. Simply call us, or e-mail details of the problem, and we will do the rest.

Always in stock – we carry a full inventory of all our products and spare parts.

Freephone Helpline – any problem or question, just call us.

Contents

Mechanical Locks

CL100 Contract locks 4

CL200 Premium quality, light duty locks with knob handles 6

CL400 Premium quality, medium duty locks with lever handles 8

CL500 Premium quality, heavy duty locks with lever handles 10

Piezo-electronic Locks

CL2000 Light duty with knob handles 12

CL4000 Medium duty with lever handles 14

CL5000 Heavy duty with lever handles 16

Technical Specifications

Mechanical Codelocks 20

Electronic Codelocks 28

Spare Parts 34

CODELOCKS
control + convenience

CODELOCK 100 MECHANICAL

- **Simple convenient control**
- Easy to fit
- Available in 4 functions
- Choice of 3 sizes of latch
- Code changes in minutes
- Our best value codelock

Codelock 100

This entry level lock provides a comprehensive range of functions for light duty entry control, for inner office doors, storage rooms or cupboards in commercial premises, or sheds, garage-to-house doors or cupboards at home.

Available in 4 functions to suit a wide variety of applications (see right), and in 2 finishes, the CL100 locks offer excellent value for money.

Delivered with random, unrecorded codes, simply change the code by following the clear instructions provided. Installation couldn't be simpler either – just drill one hole for the spindle, two holes for the fixing bolts and one extra if a mortice latch is required.

Available in two finishes
Silver Grey, Polished Brass

CL100

The front plate is common to all functions

100 Surface Deadbolt

150 Mortice Latch

155 Mortice Latch with Hold Open

190 BB Mortice Latch Back to Back

For full technical specifications see page 20

CODELOCK 200 MECHANICAL

- **PVD, low maintenance, weather resistant finish**
- Available in 5 functions
- Easy to fit
- Hexagonal bevelled handle and lock case
- Tumbler alignment for easy code change
- Key bypass option may be specified on any function

Codelock 200

This premium range of light duty locks offers 5 functions in 2 PVD finishes, all of which are available with key override as an option. Multiple locks can be supplied keyed alike.

Codelock 200 is suitable for a wide range of light duty entry control applications, in offices, warehouses, laboratories and around the home.

All products feature a bevelled hexagonal handle, tumbler alignment for easy code changing, and durable PVD (physical vapour deposition) finishes.

As with all Codelocks, installation and code changing are simple, thanks to the easy to follow, clear English instructions supplied.

Available in two PVD finishes
Stainless Steel, Polished Brass

CL200

The front plate is common to all functions

200 Surface Deadbolt

Key Override option is available on all functions

210 Mortice Bolt

250 Mortice Latch

255 Mortice Latch with Hold Open

290 BB Mortice Latch Back to Back

For full technical specifications see page 22

CODELOCK 400 MECHANICAL

- **Medium duty Codelock**
- PVD, weather resistant, low maintenance finish
- Full size lever handles
- Outside lever has a slipping clutch to avoid damage to the mechanism if forced
- Easy code change as often as required
- Code free option available on both Mortice Lock and Mortice Latch functions

Codelock 400

This is a medium duty range with full size lever handles, allowing use as the primary lock on doors where a knob-operated lock would be unsuitable.

The functions available allow for various ways of managing entry by code, by key and by ‘code free’ operation of the lever handle on the 415 and 425 models.

Throwing the deadbolt of the 420/425 models will lock out the code users when appropriate. A safety feature ensures that the inside lever handle will retract the deadbolt so avoiding accidentally locking a person in the room. The key can be used to retract the latchbolt and so may be issued for cleaning and security staff use.

Codelock 400 can also be supplied as front and back plates only, for use with customer’s own installed mortice locks, making it an ideal economic solution for high traffic door control in health, educational and other institutional premises.

Available in two PVD finishes
Stainless Steel, Polished Brass

CL400

The front plate is common to all functions

420 Mortice Lock
with safety feature

425 Mortice Lock
with safety feature and code free entry option

410 Mortice Latch

415 Mortice Latch
With code free entry option

410 BB Mortice Latch
Any of the functions may be specified as Back to Back (BB) to provide coded access in both directions

400 Plates Only
Utilising existing door lock or latch

405 Plates Only
As 400 with code free entry option

For full technical specifications see page 24

CODELOCK 500 MECHANICAL

- **Heavy duty Codelock**
- PVD, weather resistant, low maintenance finish
- Full size lever handles
- Outside lever has a slipping clutch to avoid damage to the mechanism if forced
- Easy code change as often as required
- Code free option available on both Mortice Lock and Mortice Latch functions

Codelock 500

This is a heavy duty range with full size lever handles, allowing use as the primary lock on most doors, particularly in high traffic situations.

The functions available allow for various ways of managing entry by code, by key and by ‘code free’ operation of the lever handle on the 515 and 525 models.

Throwing the deadbolt of the 520/525 models will lock out the code users when appropriate. A safety feature ensures that the inside lever handle will retract the deadbolt so avoiding accidentally locking a person in the room. The key can be used to retract the latchbolt and so may be issued for cleaning and security staff use.

Available in two PVD finishes
Stainless Steel, Polished Brass

CL500

The front plate is common to all functions

520 Mortice Lock
with safety feature

525 Mortice Lock
with safety feature and code free entry option

510 Mortice Latch

515 Mortice Latch
With code free entry option

510 BB Mortice Latch
Any of the functions may be specified as Back to Back (BB) to provide coded access in both directions

500 Panic Kit
Coded front plate only with extra long spindle to work with most single point panic pads or bars (not supplied)

500 Plates Only
Utilising existing door lock or latch

505 Plates Only
As 500 with code free entry option

For full technical specifications see page 26

CODELOCK 2000 ELECTRONIC

- **New Piezo Technology**
- Over 500,000 operations from 4xAA cells
- PVD, weather resistant, low maintenance finish
- Connections for remote release by reception desk button
- Connections for release by alarm system
- Code free entry mechanically by key or electronically from keypad
- Allows up to 90 user codes 4, 5 or 6 digits long
- Tamper alarm and low battery warning

Codelock 2000

The electronic range of Codelocks represents a major step forward in entry control. Based on Piezo technology, these products offer an exceptional battery life of 500,000 operations from the 4x1.5v AA cells@2900mAh.

The entry level CL2000 is a stylish design incorporating twin LED lamps within the button housing. With fast, easy programming of up to 90 different user codes via the keypad, the CL2000 is ideal for a wide range of light duty entry control applications, in health, educational, commercial and residential environments.

Electronic functionality provides major benefits over mechanical locks, such as programming at the keypad, multiple codes, one-time user codes, remote release, automatic fire alarm release, and incorrect code alarm. The non volatile memory retains settings when batteries are changed.

Programme commands include :

- Set new User Code
- Suspend and restore individual User Codes
- Suspend, restore and delete all User Codes
- Set One-time User Code
- Set and cancel Code Free Mode
- Change Master Code

Available in two PVD finishes
Stainless Steel, Polished Brass

CL2000

The front plate is common to all functions

PIEZO power

2020 Mortice Lock
with Key Override, code lockout by deadbolt operation and safety feature to prevent accidental lock-ins

2010 Mortice Latch
(inside view)

2010 Mortice Latch
(front view)

For full technical specifications see page 28

CODELOCK 4000 ELECTRONIC

- **New Piezo Technology**
- Over 500,000 operations from 4xAA cells
- PVD, weather resistant, low maintenance finish
- Connections for remote release by reception desk button
- Connections for release by alarm system
- Code free entry mechanically by key or electronically from keypad
- Allows up to 90 user codes 4, 5 or 6 digits long
- Tamper alarm and low battery warning

Codelock 4000

CL4000 is a medium duty electronic lock offering all the functions of the CL2000, but with the benefit of full size lever handles which allow it to be used as the primary lock on doors where a knob operated lock would not be suitable.

CL4000 is a stylish, contemporary design, programmable at the keypad with a range of commands which makes it particularly suitable for medium duty use in health, educational, commercial and residential environments.

Electronic functionality provides major benefits over mechanical locks, such as programming at the keypad, multiple codes, one-time user codes, remote release, automatic fire alarm release, and incorrect code alarm. The non volatile memory retains settings when batteries are changed.

Programme commands include :

- Set new User Code
- Suspend and restore individual User Codes
- Suspend, restore and delete all User Codes
- Set One-time User Code
- Set and cancel Code Free Mode
- Change Master Code

Available in two PVD finishes
Stainless Steel, Polished Brass

CL4000

The front plate is common to all functions

PIEZO power

4020 Mortice Lock
with Key Override, code lockout by deadbolt operation and safety feature to prevent accidental lock-ins

4010 Mortice Latch
(inside view)

4010 Mortice Latch
(front view)

For full technical specifications see page 30

CODELOCK 5000 ELECTRONIC

- **New Piezo Technology**
- Over 500,000 operations from 4xAA cells
- PVD, weather resistant, low maintenance finish
- Connections for remote release by reception desk button
- Connections for release by alarm system
- Code free entry mechanically by key or electronically from keypad
- Allows up to 90 user codes 4, 5 or 6 digits long
- Tamper alarm and low battery warning

Codelock 5000

CL5000 is a heavy duty electronic Codelock with full size lever handles for use in high traffic applications. The stylish, contemporary design incorporates all the features of the CL2000 and CL4000 in a larger, more robust assembly.

Unlike the other locks in the range the CL5000 has a conventional 3x4 button keypad with which most users will be instantly familiar.

Electronic functionality provides major benefits over mechanical locks, such as programming at the keypad, multiple codes, one-time user codes, remote release, automatic fire alarm release, and incorrect code alarm. The non volatile memory retains settings when batteries are changed.

Programme commands include :

- Set new User Code
- Suspend and restore individual User Codes
- Suspend, restore and delete all User Codes
- Set One-time User Code
- Set and cancel Code Free Mode
- Change Master Code

Available in three PVD finishes
Stainless Steel,
Black Chrome,
Polished Brass

CL5000

The front plate is common to all functions

PIEZO power

5020 Mortice Lock
with Key Override, code lockout by deadbolt operation and safety feature to prevent accidental lock-ins

5010 Mortice Latch
(inside view)

5010 Mortice Latch
(front view)

Both the 5010 and the 5020 locks may be ordered as Back to Back, with independent keypad plates on both sides to provide coded access in both directions.

For full technical specifications see page 32

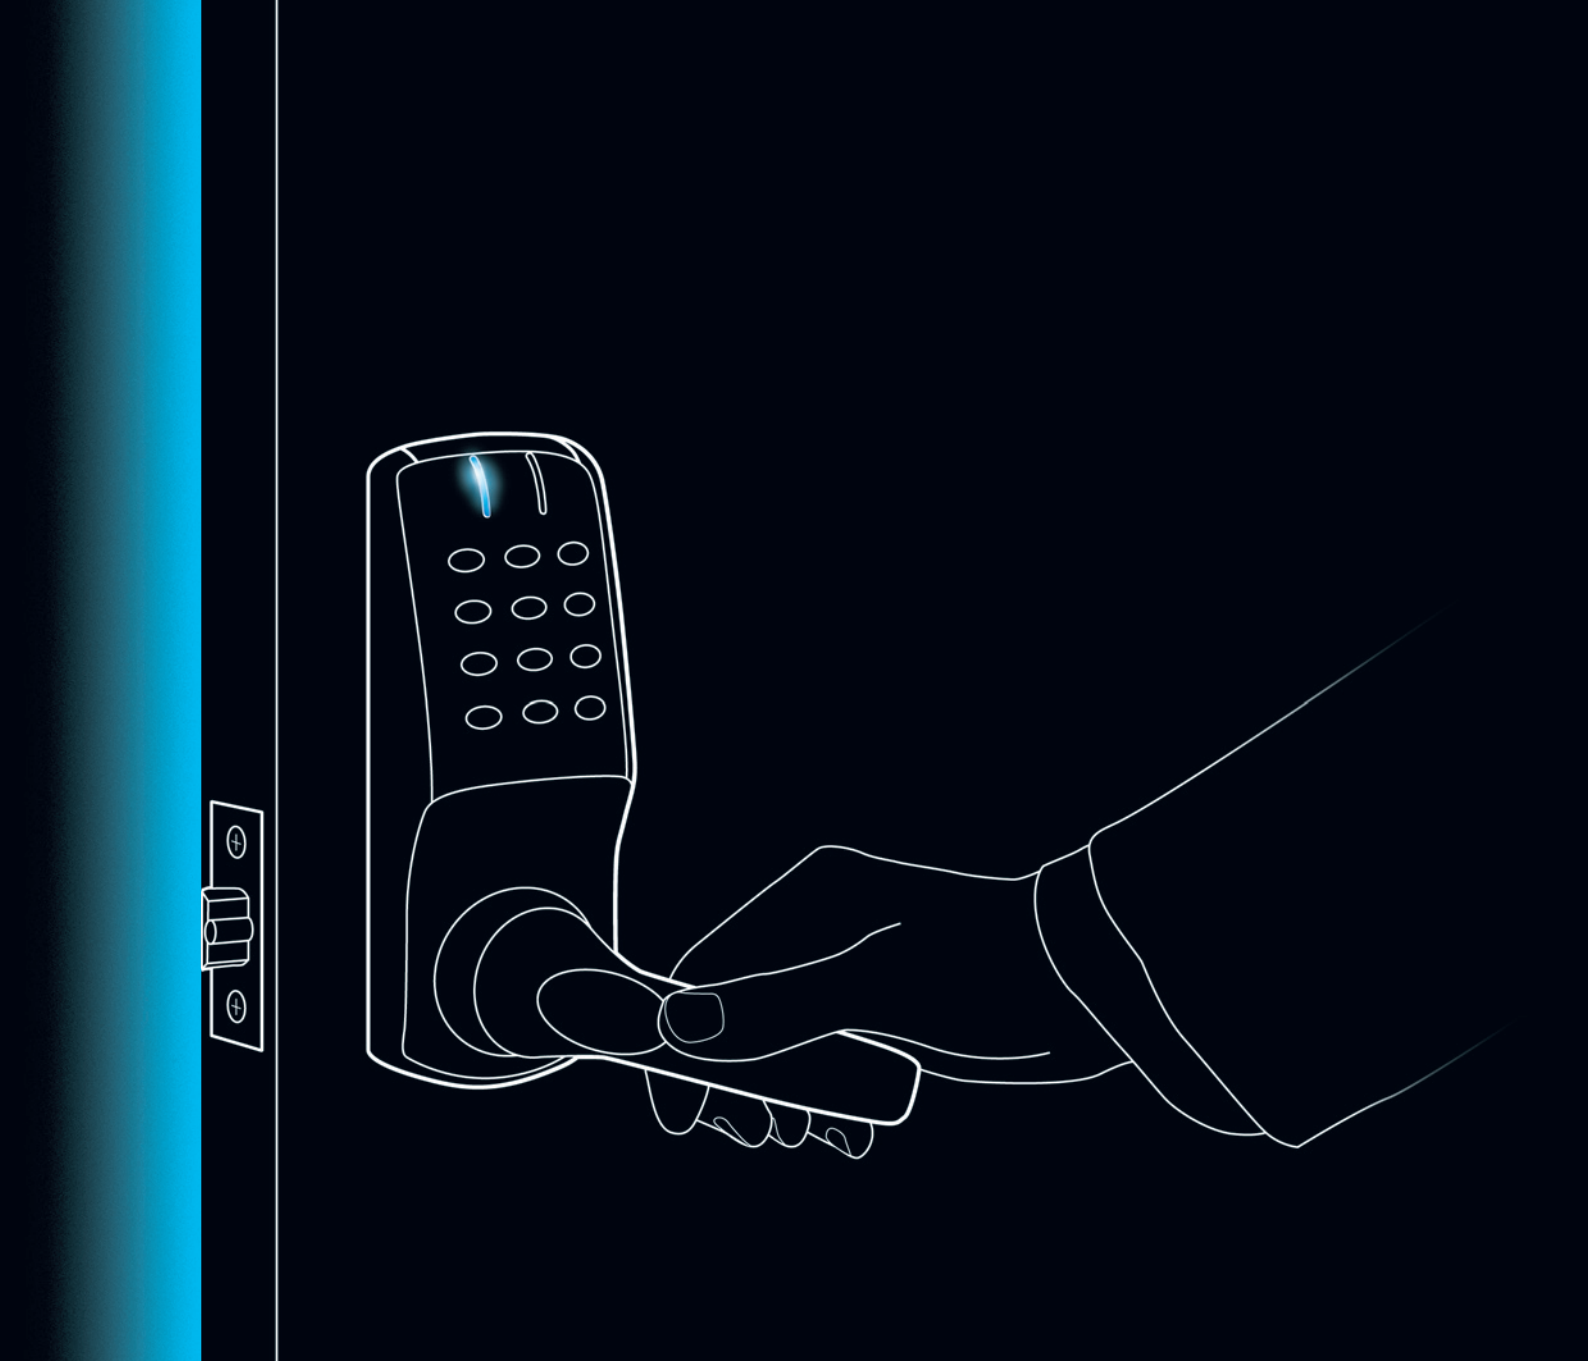

Technical Specification

Technical Specification

CODELOCK 100 MECHANICAL

SG – Silver Grey

PB – Polished Brass

Door thickness	35mm - 65mm
Spindle type	Flat spring loaded spindle
Body material	Zinc alloy
Non handed	Lock will fit doors hung on the left or right
Latch	Light duty with stainless steel latchbolt head, with “anti-shim” plunger, 60mm backset requires 25mm hole, 82mm deep Also available to order: – 50mm backset latch requiring 25 x 72mm hole or – 70mm backest latch requiring 25 x 92mm hole

Neoprene seals are included on both sides to provide friction against the face of the door and to avoid damage from overtightening of the fixing bolts.

CL100 is suitable for internal and external use.

Codes: All our mechanical locks are supplied with a random code commencing with the `C` clear button. To change the code after fitting the lock must first be removed from the door.

The code is non sequential, that is the code can be entered in any order e.g. 1234 can be 4321 or 1342 or whatever is the most convenient sequence. With the 13 buttons a total of 8,191 different codes are available, any of which may be entered in any order.

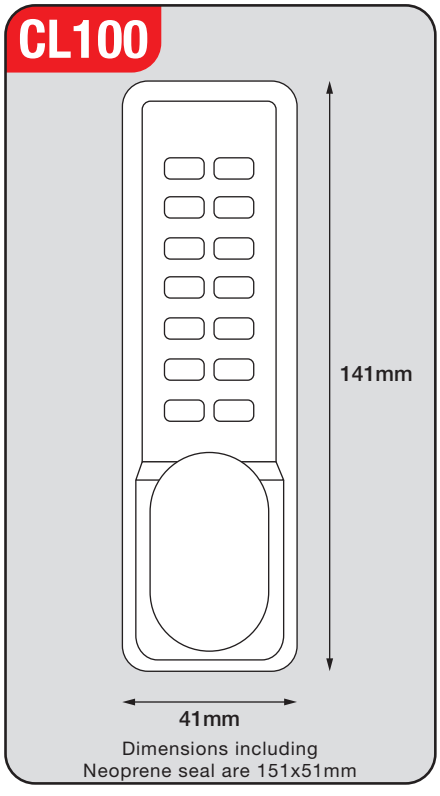

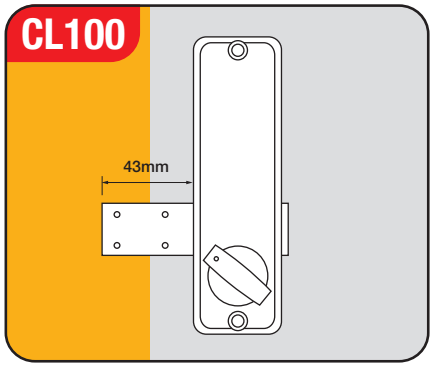

CL100 Surface Deadbolt

Bolt slides on inside surface to lock or unlock. Bolt is moved manually by means of the outside knob after code input and freely by the inside knob at all times. Amortice keeper plate is provided.

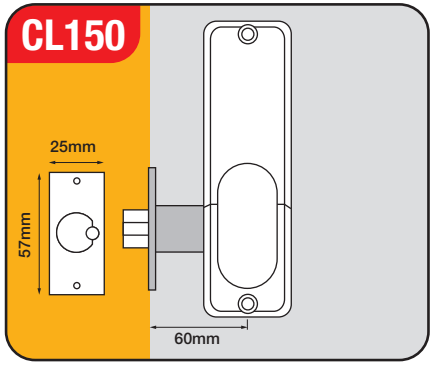

CL150 Mortice Latch

Latch is spring loaded and will lock automatically when the door is closed. The latch bolt has a deadlocking plunger feature to prevent unlawful shimming of the latch.

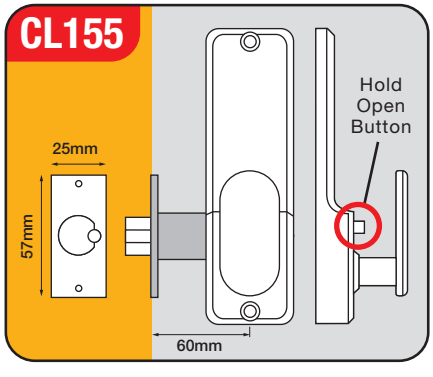

CL155 Mortice Latch – Hold Open

Functionally the same as the 150 with the addition of a slide button which can be used to hold open the latchbolt when the lock is not required to be operational.

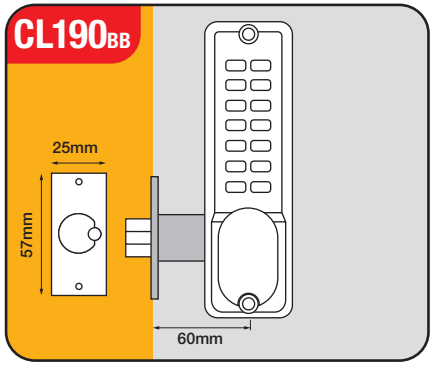

CL190BB Back to Back

The CL150 Mortice Latch may be ordered with two code plates, installed Back to Back, to provide coded access in both directions. Specify CL190 BB.

Technical Specification

CODELOCK 200 MECHANICAL

SS – Stainless Steel

PB – Polished Brass

Door thickness	35mm - 65mm
Spindle type	Flat spring loaded spindle
Body material	Zinc alloy
Non handed	Lock will fit doors hung on the left or right
Latch	Light duty with stainless steel latchbolt head, with “anti-shim” plunger, 60mm backset requires 25mm hole, 82mm deep Also available to order: – 50mm backset latch requiring 25 x 72mm hole or – 70mm backest latch requiring 25 x 92mm hole
Finishes available	PVD (Physical Vapour Deposition) hardwearing low maintenance finishes SS (stainless steel) and PB (Polished Brass).

Cylinders may be ordered Keyed Alike on request.

Neoprene seals are included on both sides to provide friction against the face of the door and to avoid damage from overtightening of the fixing bolts.

CL200 is suitable for internal and external use.

Codes: All our mechanical locks are supplied with a random code commencing with the `C` clear button. To change the code after fitting the lock must first be removed from the door.

The code is non sequential, that is the code can be entered in any order e.g. 1234 can be 4321 or 1342 or whatever is the most convenient sequence. With the 13 buttons a total of 8,191 different codes are available, any of which may be entered in any order.

CL200

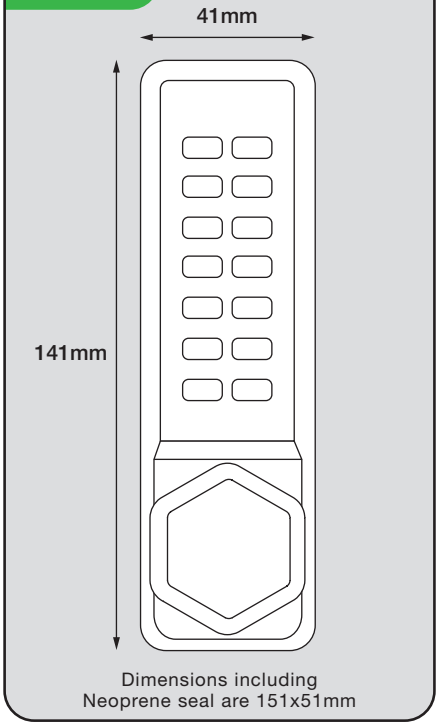

Dimensions including
Neoprene seal are 151x51mm



Key Override

Any of the CL200 functions may be ordered with key override. Locks may be keyed alike if required.

CL210

CL210 Mortice Deadbolt

NOT ILLLUSTRATED

Sizes as 250. Bolt extends 25mm beyond door edge when locked.

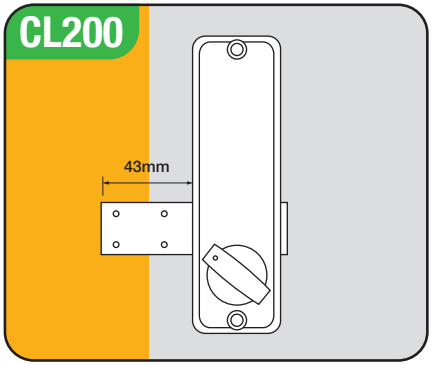

CL200 Surface Deadbolt

Bolt slides on inside surface to lock or unlock. Bolt is moved manually by means of the outside knob after code input and freely by the inside knob at all times. Amortice keeper plate is provided.

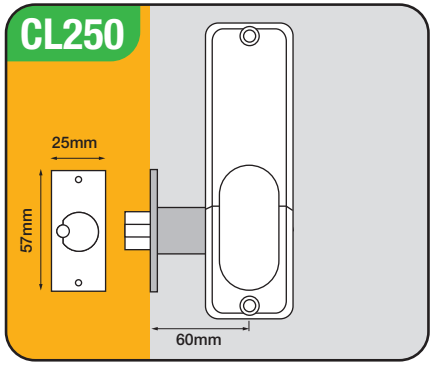

CL250 Mortice Latch

Latch is spring loaded and will lock automatically when the door is closed. The latch bolt has a deadlocking plunger feature to prevent unlawful shimming of the latch.

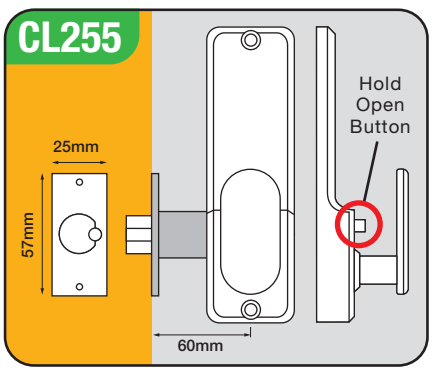

CL255 Mortice Latch – Hold Open

Functionally the same as the 250 with the addition of a slide button which can be used to hold open the latchbolt when the lock is not required to be operational.

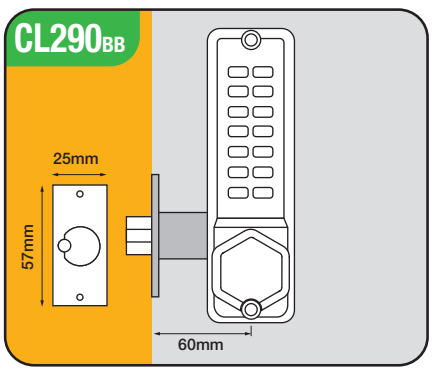

CL290BB Back to Back

The CL250 Mortice Latch may be ordered with two code plates, installed Back to Back, to provide coded access in both directions.

Technical Specification

CODELOCK 400 MECHANICAL

SS – Stainless Steel

PB – Polished Brass

Door thickness	35mm - 65mm
Spindle type	2 part 8mm spring loaded spindle
Body material	Zinc alloy
Non handed	Lock will fit doors hung on the left or right

Mortice Latch (410 & 415) Medium duty, stainless steel latch bolt head with “anti-shim” plunger, 8mm follower. 60mm backset, requires 25mm hole, 82mm deep. Option as above with 70mm backset requiring 92mm hole.

Mortice Lock (420 & 425) Euro profile mortice sash lock with deadbolt and latchbolt. Complete with double cylinder to control deadbolt and to retract latchbolt. With the deadbolt locked it denies access to a code user. The key can be used to open doors for management functions such as security and cleaning. The split follower enables the inside lever to retract the deadbolt and latch to prevent accidental lock in when the deadbolt is thrown.

Cylinders Double Euro Profile cylinders with 3 keys. May be ordered Keyed Alike.

Finishes available PVD (Physical Vapour Deposition) hardwearing low maintenance finishes SS (stainless steel) and PB (Polished Brass).

Code Free Access option via keypad on models 415 & 425.

Neoprene seals are included on both sides to provide friction against the face of the door and to prevent damage from over tightening of the fixing bolts.

The outside lever handle has a slipping clutch to prevent damage to the lock if the handle is forced.

Suitable for internal and external use.

Codes: All our mechanical locks are supplied with a random code commencing with the `C` clear button. To change the code after fitting the lock must first be removed from the door.

The code is non sequential, that is the code can be entered in any order e.g. 1234 can be 4321 or 1342 or whatever is the most convenient sequence. With the 13 buttons a total of 8,191 different codes are available, any of which may be entered in any order.

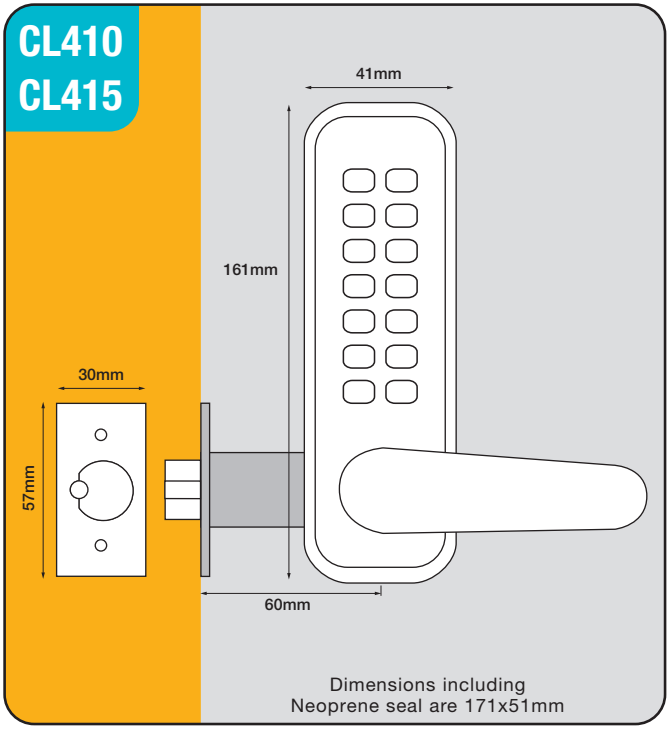

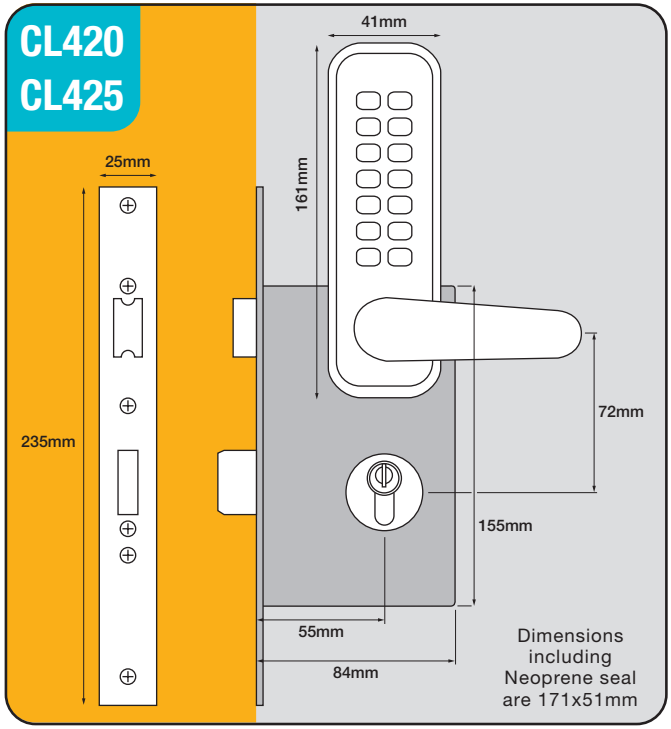

CL410 Mortice Latch

Outside lever handle will retract the latch after a correct code is entered. The spring loaded latchbolt will lock automatically when the door is closed.

CL415 Mortice Latch

As CL410 with Code Free Access option on keypad. In code free mode the outside lever will retract the latchbolt without using a code.

CL400 **Front & Back Plates Only** NOT ILLLUSTRATED

As 410 for use with existing lock or latch.

CL405 **Front & Back Plates Only** NOT ILLLUSTRATED

As 415 with code free access, for use with existing lock or latch.

CL420 Full Mortice Lock with Safety Feature

Outside lever handle will retract the latch after a correct code is entered. The spring loaded latchbolt will lock automatically when the door is closed. Key retracts latchbolt for entry without using a code. Key controls deadbolt position. When deadbolt is projected it denies access by code. When deadbolt is projected the safety feature allows the inside lever handle to retract the deadbolt and the latchbolt, preventing people being accidentally locked in.

CL425 Full Mortice Lock with Safety Feature

As CL420 with Code Free Access function on the keypad. In code free mode the outside lever will retract the latchbolt without using a code.

Back to Back NOT ILLLUSTRATED

Any of the above functions may be ordered with two keypad plates for installation on both sides of the door to provide coded access in both directions.

Technical Specification

CODELOCK 500 MECHANICAL

SS – Stainless Steel

PB – Polished Brass

Door thickness	35mm - 65mm
Spindle type	2 part 8mm spring loaded spindle
Body material	Zinc alloy
Non handed	Lock will fit doors hung on the left or right

Mortice Latch (510 & 515) Medium duty, stainless steel latch bolt head with “anti-shim” plunger, 8mm follower. 60mm backset, requires 25mm hole, 82mm deep. Option as above with 70mm backset requiring 92mm hole.

Mortice Lock (520 & 525) Euro profile mortice sash lock with deadbolt and latchbolt. Complete with double cylinder to control deadbolt and to retract latchbolt. With the deadbolt locked it denies access to a code user. The key can be used to open doors for management functions such as security and cleaning. The split follower enables the inside lever to retract the deadbolt and latch to prevent accidental lock in when the deadbolt is thrown.

Cylinders Double Euro Profile cylinders with 3 keys. May be ordered Keyed Alike.

Finishes available PVD (Physical Vapour Deposition) hardwearing low maintenance finishes SS (stainless steel) and PB (Polished Brass).

Code Free Access option via keypad on models 515 & 525.

Neoprene seals are included on both sides to provide friction against the face of the door and to prevent damage from over tightening of the fixing bolts.

The outside lever handle has a slipping clutch to prevent damage to the lock if the handle is forced.

Suitable for internal and external use.

Codes: All our mechanical locks are supplied with a random code commencing with the `C` clear button. To change the code after fitting the lock must first be removed from the door.

The code is non sequential, that is the code can be entered in any order e.g. 1234 can be 4321 or 1342 or whatever is the most convenient sequence. With the 13 buttons a total of 8,191 different codes are available, any of which may be entered in any order.

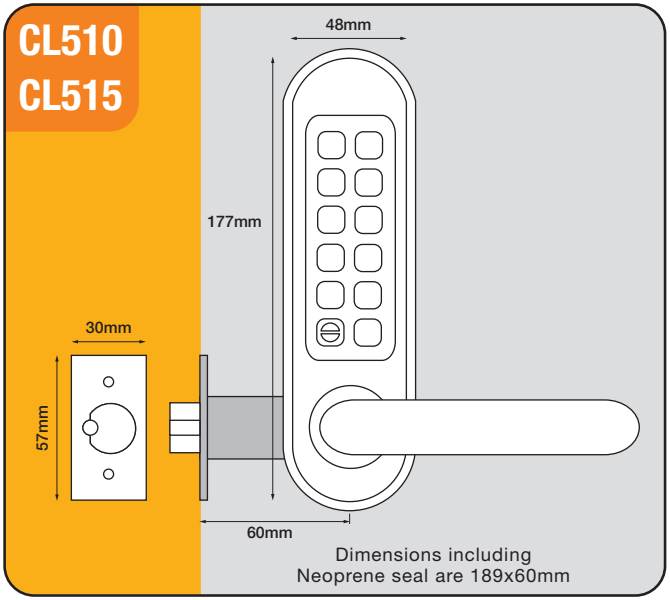

CL510 Mortice Latch

Outside lever handle will retract the latch after a correct code is entered. The spring loaded latchbolt will lock automatically when the door is closed.

CL515 Mortice Latch

As CL510 with Code Free Access option on keypad. In code free mode the outside lever will retract the latchbolt without using a code.

CL500 **Front & Back Plates Only** NOT ILLLUSTRATED

As 510 for use with an existing lock or latch.

CL505 **Front & Back Plates Only** NOT ILLLUSTRATED

As 515 with code free access, for use with an existing lock or latch.

CL510PK **Panic Device Access Kit** NOT ILLLUSTRATED

Keypad plate only, supplied with an extra long spindle to work with most exit devices with 8mm square followers. Specify if exit device is surface mounted or mortice type.

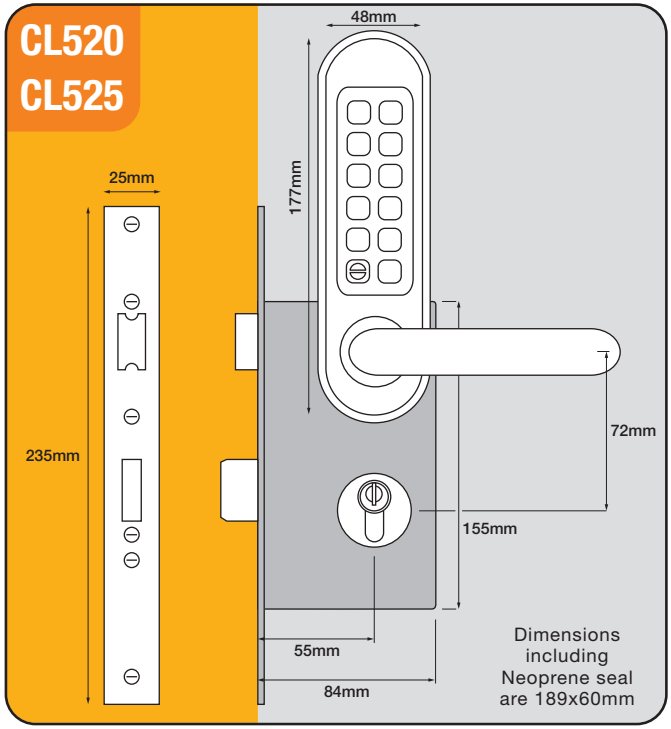

CL520 Full Mortice Lock with Safety Feature

Outside lever handle will retract the latch after a correct code is entered. The spring loaded latchbolt will lock automatically when the door is closed. Key retracts latchbolt for entry without using a code. Key controls deadbolt position. When deadbolt is projected it denies access by code. When deadbolt is projected the safety feature allows the inside lever handle to retract the deadbolt and the latchbolt, preventing people being accidentally locked in.

CL525 Full Mortice Lock with Safety Feature

As CL520 with Code Free Access function on the keypad. In code free mode the outside lever will retract the latchbolt without using a code.

Back to Back NOT ILLLUSTRATED

Any of the above functions may be ordered with two keypad plates for mounting on each side of the door to provide coded access in both directions.

Technical Specification

CODELOCK 2000 ELECTRONIC

SS – Stainless Steel

PB – Polished Brass

Door thickness	35mm - 65mm
Spindle type	8mm spring loaded spindle
Body material	Zinc alloy
Non handed	Lock will fit doors hung on the left or right

Mortice Latch (2010) Medium duty, stainless steel latch bolt head with “anti-shim” plunger, 8mm follower. 60mm backset, requires 25mm hole, 82mm deep. Option as above with 70mm backset requiring 92mm hole.

Mortice Lock (2020) Euro profile mortice sash lock with deadbolt and latchbolt. Complete with double cylinder to control deadbolt and to retract latchbolt. With the deadbolt locked it denies access to a code user. The key can be used to open doors for management functions such as security and cleaning. The split follower enables the inside lever to retract the deadbolt and latch to prevent accidental lock in when the deadbolt is thrown.

Finishes available PVD (Physical Vapour Deposition) hardwearing low maintenance finishes SS (stainless steel) and PB (Polished Brass).

Batteries 4xAA Cells @2,900mAh. Calculated to provide over 500,000 operations.

Code Free mode can be set electronically at the keypad or mechanically by means of the override key.

CL2000 locks can be supplied Keyed Alike on request.

For internal and external use.

The lock can store up to 90 different user codes. Codes may be 4, 5 or six digits long. Programming is via the keypad, using the master Code.
The lock has fitted as standard two alarm release terminals. REM1 is used to open the lock from a reception desk button or answerphone. REM2 can be linked to an alarm system which, when activated, will release the door for 30 minutes. This allows emergency personnel to enter the room to rapidly check that no one has been trapped or overlooked.

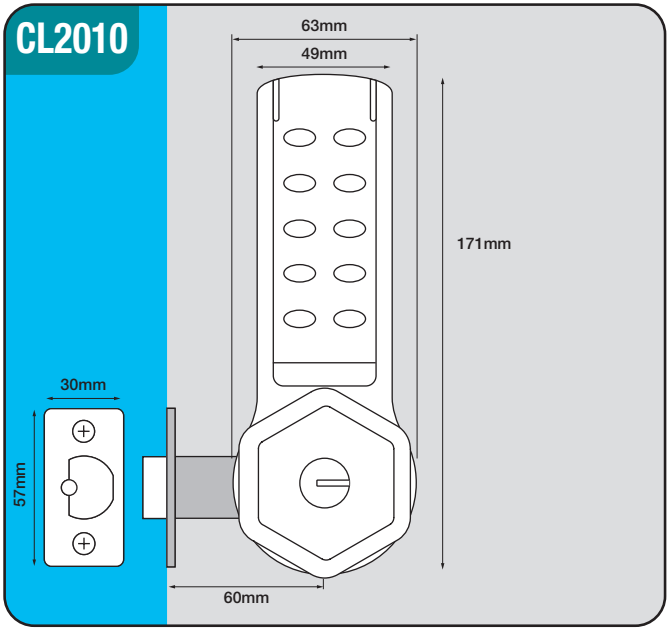

CL2010 Mortice Latch

Outside knob turns freely without operating the latchbolt. When valid code is entered and blue light burns, the knob will retract the latchbolt. When the door closes the spring latch will automatically lock the door. The key will open the door for management functions. The key may be used to set the lock into Code Free mode so that anyone can open the door without using a code. Code Free mode can also be programmed at the keypad using the Master Code.

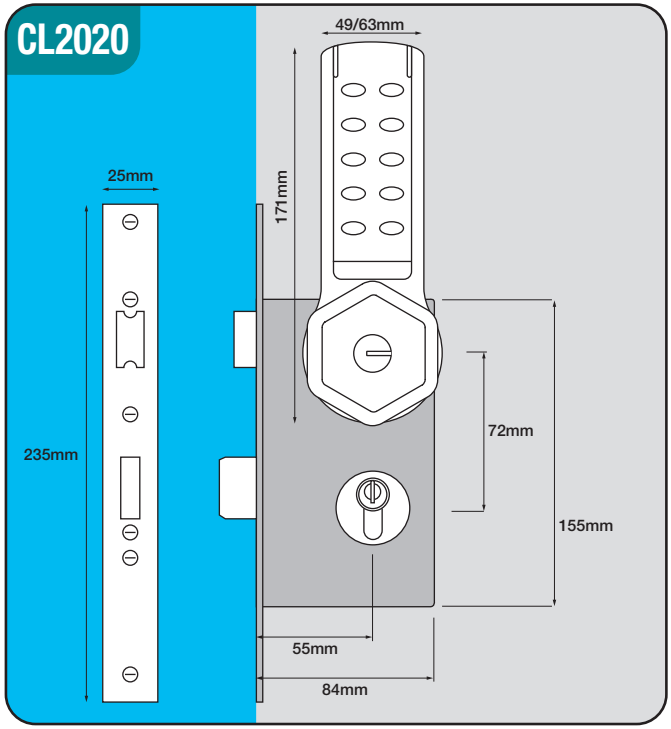

CL2020 Full Mortice Lock with Safety Feature

Outside knob and key functions as CL2010. Lockcase key retracts latchbolt for entry without using a code. Key controls the deadbolt position. When deadbolt is projected it denies access by code. When deadbolt is projected the safety feature allows the inside knob handle to retract the deadbolt and the latchbolt, preventing people being accidentally locked in.

Programming Options

01 – Enter New User Code
02 – Suspend User Code
03 – Restore User Code
04 – Suspend All User Codes
05 – Restore All User Codes
06 – Set Unlock Time
07 – One Time User Code
08 – Set Code Free Mode
09 – Cancel Code Free Mode
10 – Change Master Code
11 – Cancel Emergency Open
12 – Delete All User Codes

Technical Specification

CODELOCK 4000 ELECTRONIC

SS – Stainless Steel

PB – Polished Brass

Door thickness	35mm - 65mm
Spindle type	8mm spring loaded spindle
Body material	Zinc alloy
Non handed	Lock will fit doors hung on the left or right

Mortice Latch (4010) Medium duty, stainless steel latch bolt head with “anti-shim” plunger, 8mm follower. 60mm backset, requires 25mm hole, 82mm deep. Option as above with 70mm backset requiring 92mm hole.

Mortice Lock (4020) Euro profile mortice sash lock with deadbolt and latchbolt. Complete with double cylinder to control deadbolt and to retract latchbolt. With the deadbolt locked it denies access to a code user. The key can be used to open doors for management functions such as security and cleaning. The split follower enables the inside lever to retract the deadbolt and latch to prevent accidental lock in when the deadbolt is thrown.

Finishes available PVD (Physical Vapour Deposition) hardwearing low maintenance finishes SS (stainless steel) and PB (Polished Brass).

Batteries 4xAA Cells @2,900mAh. Calculated to provide over 500,000 operations.

Code Free mode can be set electronically at the keypad or mechanically by means of the override key.

CL4000 locks can be supplied Keyed Alike on request.

For internal and external use.

The lock can store up to 90 different user codes. Codes may be 4, 5 or six digits long. Programming is via the keypad, using the master Code.
The lock has fitted as standard two alarm release terminals. REM1 is used to open the lock from a reception desk button or answerphone. REM2 can be linked to an alarm system which, when activated, will release the door for 30 minutes. This allows emergency personnel to enter the room to rapidly check that no one has been trapped or overlooked.

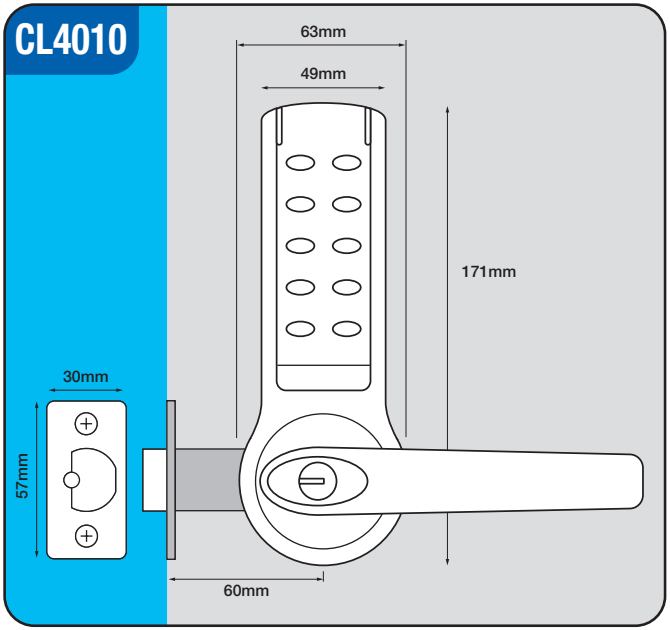

CL4010 Mortice Latch

Outside lever turns freely without operating the latchbolt. When valid code is entered and blue light burns, the lever will retract the latchbolt. When the door closes the spring latch will automatically lock the door. The key will open the door for management functions. The key may be used to set the lock into Code Free mode so that anyone can open the door without using a code. Code Free mode can also be programmed at the keypad using the Master Code.

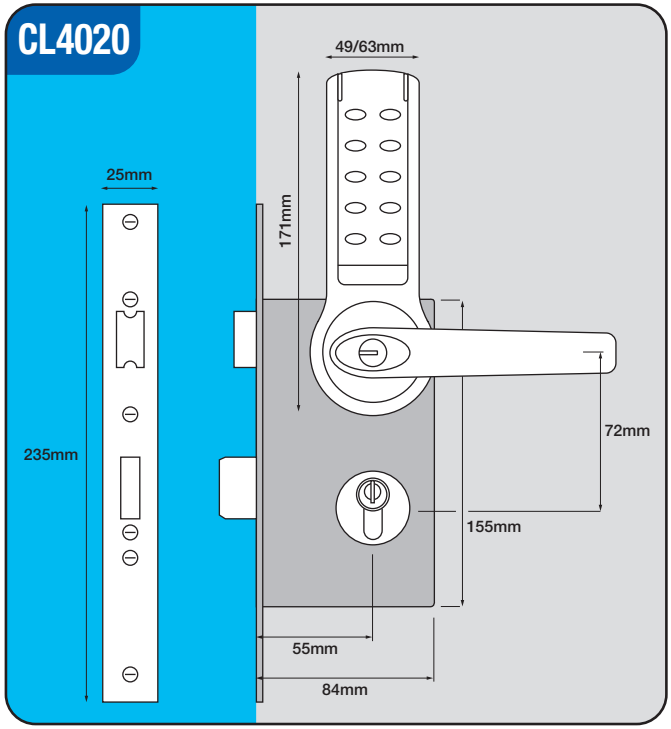

CL4020 Full Mortice Lock with Safety Feature

Outside lever and key functions as CL4010. Lockcase key retracts latchbolt for entry without using a code. Key controls the deadbolt position. When deadbolt is projected it denies access by code. When deadbolt is projected the safety feature allows the inside lever handle to retract the deadbolt and the latchbolt, preventing people being accidentally locked in.

Programming Options

01 – Enter New User Code
02 – Suspend User Code
03 – Restore User Code
04 – Suspend All User Codes
05 – Restore All User Codes
06 – Set Unlock Time
07 – One Time User Code
08 – Set Code Free Mode
09 – Cancel Code Free Mode
10 – Change Master Code
11 – Cancel Emergency Open
12 – Delete All User Codes

Technical Specification

CODELOCK 5000 ELECTRONIC

SS – Stainless Steel

BC – Black Chrome

PB – Polished Brass

Door thickness	35mm - 65mm
Spindle type	8mm spring loaded spindle
Body material	Zinc alloy
Non handed	Lock will fit doors hung on the left or right

Mortice Latch (5010) Medium duty, stainless steel latch bolt head with “anti-shim” plunger, 8mm follower. 60mm backset, requires 25mm hole, 82mm deep. Option as above with 70mm backset requiring 92mm hole.

Mortice Lock (5020) Euro profile mortice sash lock with deadbolt and latchbolt. Complete with double cylinder to control deadbolt and to retract latchbolt. With the deadbolt locked it denies access to a code user. The key can be used to open doors for management functions such as security and cleaning. The split follower enables the inside lever to retract the deadbolt and latch to prevent accidental lock in when the deadbolt is thrown.

Finishes available PVD (Physical Vapour Deposition) hardwearing low maintenance finishes SS (stainless steel) and PB (Polished Brass).

Batteries 4xAA Cells @2,900mAh. Calculated to provide over 500,000 operations.

Code Free mode can be set electronically at the keypad or mechanically by means of the override key.

CL5000 locks can be supplied Keyed Alike on request.

For internal and external use.

The lock can store up to 90 different user codes. Codes may be 4, 5 or six digits long. Programming is via the keypad, using the master Code.
The lock has fitted as standard two alarm release terminals. REM1 is used to open the lock from a reception desk button or answerphone. REM2 can be linked to an alarm system which, when activated, will release the door for 30 minutes. This allows emergency personnel to enter the room to rapidly check that no one has been trapped or overlooked.

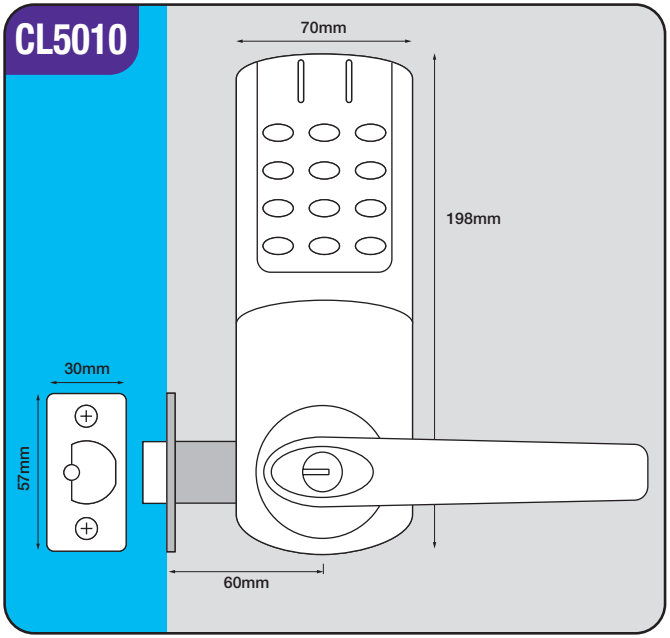

CL5010 Mortice Latch

Outside lever turns freely without operating the latchbolt. When valid code is entered and blue light burns, the lever will retract the latchbolt. When the door closes the spring latch will automatically lock the door. The key will open the door for management functions. The key may be used to set the lock into Code Free mode so that anyone can open the door without using a code. Code Free mode can also be programmed at the keypad using the Master Code.

CL5010BB Back to Back

CL5000 locks may be ordered with 2 keypad plates for installation on both sides of the door to provide coded access in both directions.

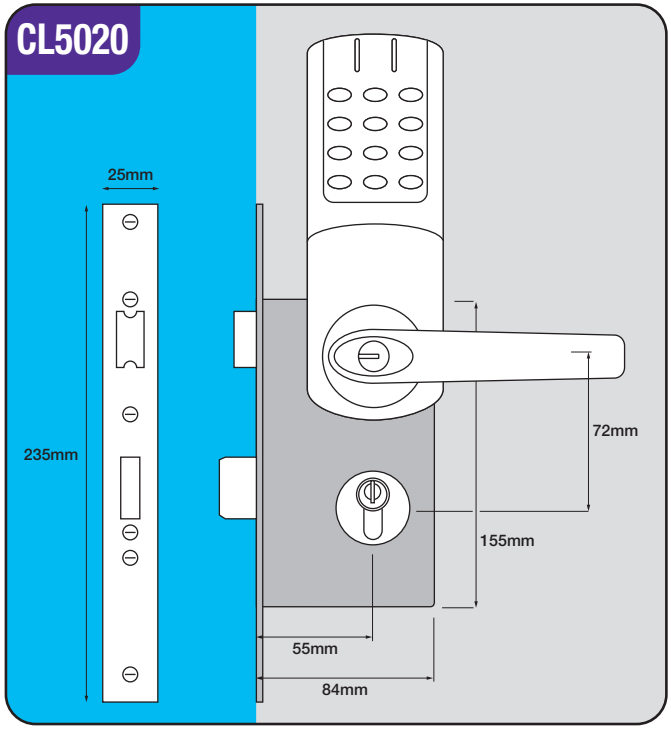

CL5020 Full Mortice Lock with Safety Feature

Outside lever and key functions as CL5010. Lockcase key retracts latchbolt for entry without using a code. Key controls the deadbolt position. When deadbolt is projected it denies access by code. When deadbolt is projected the safety feature allows the inside lever handle to retract the deadbolt and the latchbolt, preventing people being accidentally locked in.

Programming Options

01 – Enter New User Code
02 – Suspend User Code
03 – Restore User Code
04 – Suspend All User Codes
05 – Restore All User Codes
06 – Set Unlock Time
07 – One Time User Code
08 – Set Code Free Mode
09 – Cancel Code Free Mode
10 – Change Master Code
11 – Cancel Emergency Open
12 – Delete All User Codes

Helpline, Service & Spares

Freephone 0800 393405

CODELOCKS

control + convenience

05/01/05

CODELOCKS

control + convenience

CODELOCKS LLC
CALIFORNIA, USA

Tel +1 714 979 2900
Fax +1 714 979 2902
sales@codelocks.us

CODELOCKS LTD
NEWBURY RG19 8AT
UNITED KINGDOM

Tel +44 (0)1635 268029
Fax +44 (0)1635 268031
sales@codelocks.co.uk

CODELOCKS CHINA LTD
JINSHA, GUANGDONG

Tel +86 757 8660 1981-3
Fax +86 757 8660 1980
sales@codelocks.cn

www.codelocks.com